





OCEAN SAFETY®



datasheet

## MED Ship's Wheel Approved LED lifejacket light

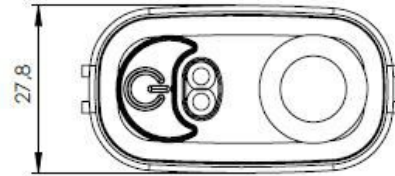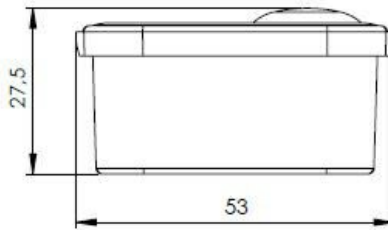

### Details

This new, low profile light is a single compact flashing unit. It is manually activated by pressing the switch on the front of the light and also the light activates automatically when in water and can be turned off manually if required.

The light is emitted through an ultra low profile dome, making the light less susceptible to damage during evacuation. Supplied with a new tamper proof clip.

MODEL	APOLLO Lifejacket Light
Colour	Yellow (Standard)
Output	Minimum 0.75 cd Light
Duration	Minimum 8 hours Light
Type	Flashing LED Material ABS Polycarbonate/TPE
Storage Temp	-30°C to + 65°C
Operating Temp	-1°C to + 30°C
Storage Life	5 years
Weight Nominal	31 g
Battery Type	Lithium Manganese Dioxide
Activation	Water/Manual
Approvals	Classification Societies SOLAS/MED/USCG

MED/SOLAS



0038/YY

Description	Partnumber
APOLLO Automatic lifejacket light MED Ship's Wheel Approved	LIF2080

Your Life Saving Supplier

Ocean Safety Ltd, Saxon Wharf, Lower York Street, Southampton, SO14 5QF

Tel: +44(0) 2380 720 800 Fax: +44(0) 2380 720 801

www.oceansafety.com email: info@oceansafety.com

oceansafety.com